


RFID HARD TAG HP098

MARKETS:



Waste
management

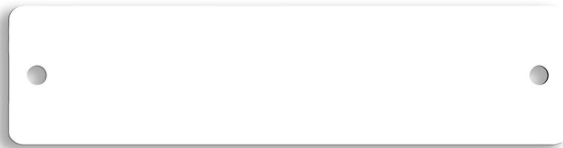

Industry



Logistics

COLOUR:



White

The HP098 is a RFID hard tag made from flexible and ductile PVC thermoplastic. Rectangular in shape, it measures 120 x 30 mm and features two 4 mm diameter **holes for secure screw-mounting. It can also be affixed with adhesive, making it suitable for non-metallic surfaces.** Available in white, the HP098 operates on **both European and US UHF frequencies and is equipped with the advanced HIGGS 9 chip.** You can customise the tag with your logo using offset and pad printing, while numbering can be precisely applied with either laser or inkjet technology.

MARKETS

With an **IP68** protection rating, the HP098 is highly resistant to water, fumes, and dust, ensuring reliable performance in demanding environments. This hard tag is an ideal solution for various applications within **logistics and industry, including asset management projects, vehicle identification, and waste collection,** offering robust and reliable tracking capabilities.



European frequency (EU) 868 MHz - US frequency 920 MHz

RFID features

Chip	Memory	ISO Standard
HIGGS 9	86 bytes - TID: 6 bytes - EPC: 62 bytes	ISO 18000-6C / EPC Class 1 Gen 2

Technical specifications

Application	Non-metal surfaces
IP rating	68
Dimensions	120 x 30 mm - ø hole 4 mm
Material	PVC
Application method	Screws or adhesive
Operating and storage temperature	-40°C ~ +60°C

Customisation

Colour	White
Type of printing	Offset and pad printing
Type of numbering	Laser, inkjet

