

## RFID HARD TAG HT084


### MARKETS:



Industry



Logistics

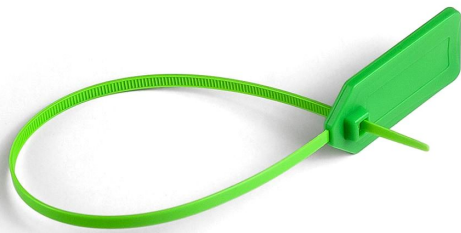

### COLORS:



Black Green

The HT084 is a **"Seal tag,"** also known as a **"cable tie tag with seal"** due to its typical use. It's made from PA66 nylon, a **plastic material offering excellent resistance to shocks, wear, and weathering.** Its superior abrasion resistance, flexibility, and compact design make it ideal for **applications requiring a durable, secure, and quick-to-apply cable tie tag on non-metallic surfaces.** Measuring 348 x 28 x 4 mm and weighing 6 grams, it's available in all three frequencies: **LF (Low Frequency), HF (High Frequency), and UHF (Ultra High Frequency).**

Offered in black or green, it can be customized with a logo using silk-screen printing, while numbering is applied with laser technology.

### MARKETS

Conforming to IP67 standards, the HT084 is resistant to dust and can be immersed in water up to one meter deep for 24 hours. This hard tag is suitable for **identifying parts or monitoring activities in asset management, logistics, production, and general industry, particularly within the supply chain or automotive sector.**



frequency 125 kHz

RFID features		
Chip	Memory	ISO Standard
EM4100 or GK4100	0 bytes - UID: 8 bytes	-
EM4102	0 bytes - UID: 8 bytes	-
EM4200	0 bytes - UID: 8 bytes	ISO 11784 / 11785
EM4550 or TITAN	128 bytes - UID: 8 bytes	ISO 11784 / 11785
EM4305	64 bytes - UID: 4 bytes	ISO 11784 / 11785
ATA5577 or T5567	36 bytes - UID: 8 bytes	ISO 11784 / 11785
Q5 or 5555	33 bytes - UID: 8 bytes	ISO 11784 / 11785
HITAG1	256 bytes	-
HITAG2	32 bytes	ISO 11784 / 11785
HITAG S 2048	256 bytes - UID: 4 bytes	ISO 11784 / 11785
HITAG S 256	32 bytes - UID: 4 bytes	ISO 11784 / 11785
SIC279	16/24 bytes	ISO 11784 / 11785
S5777	28 bytes - UID: 8 bytes	ISO 15693



frequency 13.56 MHz

RFID features			
Chip	Memory	ISO Standard	NFC Standard
RF81	1024 bytes - UID: 4 bytes	ISO 14443 A	Not supported by majority of NFC devices
FM11RF08	1024 bytes - UID: 4 bytes	ISO 14443 A	Not supported by majority of NFC devices
RF005	64 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
RF32	4096 bytes - UID: 4 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE CLASSIC 1K EV1 S50	1024 bytes - UID: 4 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE CLASSIC 1K EV1 S50 7 BYTES	1024 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE CLASSIC 4K EV1 S70	4096 bytes - UID: 4 bytes	ISO 14443 A	Type 2 - tag compliant
MIFARE ULTRALIGHT EV1-1	48 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant
MIFARE ULTRALIGHT EV1-2	128 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant
MIFARE ULTRALIGHT C	144 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant
MIFARE DESFIRE EV1 2K	2048 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
MIFARE DESFIRE EV1 4K	4096 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
MIFARE DESFIRE EV1 8K	8192 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
MIFARE DESFIRE EV2 2K	2048 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
MIFARE DESFIRE EV2 4K	4096 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant



frequency 13.56 MHz

#### RFID features

Chip	Memory	ISO Standard	NFC Standard
MIFARE DESFIRE EV2 8K	8192 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
MIFARE DESFIRE EV3 4K	4096 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
MIFARE DESFIRE EV3 8K	8192 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
MIFARE DESFIRE LIGHT	640 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
MIFARE PLUS SE	1024 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE PLUS 2K	2048 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE PLUS 4K	4096 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE PLUS X 2K	2048 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE PLUS X 4K	4096 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE PLUS EV2 2K	2048 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIFARE PLUS EV2 4K	4096 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
ATC1024-MV110	944 bytes - UID: 8 bytes	ISO 15693	Not supported by majority of NFC devices
ATC256-MV410	224 bytes - UID: 8 bytes	ISO 15693	Not supported by majority of NFC devices
ATC4096-MP311	4096 bytes - UID: 7 bytes	ISO 14443 A	Not supported by majority of NFC devices
CTC4096-MP410	2984 bytes (advant) / 1002 bytes (prime) - UID: 4/7 bytes	ISO 14443 A	Not supported by majority of NFC devices
CTC4096-MM410	2984 bytes (advant) / 1002 bytes (prime) - UID: 4/7 bytes	ISO 15693 - ISO 14443 A	Not supported by majority of NFC devices
EM4233	256 bytes - UID: 8 bytes	ISO 15693	Not supported by majority of NFC devices
ICODE SLI-S	256 bytes - UID: 8 bytes	ISO 15693	Type 5 - tag compliant
ICODE SLIX	128 bytes - UID: 8 bytes	ISO 15693	Type 5 - tag compliant
ICODE SLIX2	316 bytes - UID: 8 bytes	ISO 15693	Not supported by majority of NFC devices
ICODE SLIX-S	160 bytes - UID: 8 bytes	ISO 15693	Type 5 - tag compliant
ICODE DNA	252 bytes - UID: 8 bytes	ISO 15693	Type 5 - tag compliant
MIM1024/PRIME	1024 bytes	ISO 14443 A	Not supported by majority of NFC devices
MIM256/PRIME	256 bytes	ISO 14443 A	Not supported by majority of NFC devices
NTAG210	48 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant
NTAG212	128 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant
NTAG213	144 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant



frequency 13.56 MHz

RFID features			
Chip	Memory	ISO Standard	NFC Standard
NTAG215	504 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant
NTAG216	888 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant
NTAG213 TT (TAG TAMPER)	144 bytes - UID: 7 bytes	ISO 14443 A	Type 2 - tag compliant
NTAG413 DNA	32/128 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
NTAG424 DNA	416 bytes - UID: 7 bytes	ISO 14443 A	Type 4 - tag compliant
ST25TV02K	250 bytes - UID: 8 bytes	ISO 15693	Type 5 - tag compliant
ST25TB512	64 bytes - UID: 8 bytes	ISO 14443 B	Type 4 - tag compliant
ST25TB04K	512 bytes - UID: 8 bytes	ISO 14443 B	Type 4 - tag compliant
ST25TB02K	256 bytes - UID: 8 bytes	ISO 14443 B	Type 4 - tag compliant
TAG-IT 256	32 bytes - UID: 8 bytes	ISO 15693	Type 5 - tag compliant
TAG-IT 2K	256 bytes - UID: 8 bytes	ISO 15693	Type 5 - tag compliant
MB89R118	2000 bytes - UID: 8 bytes	ISO 15693	Not supported by majority of NFC devices



European frequency (EU) 868 MHz - US frequency 920 MHz

RFID features		
Chip	Memory	ISO Standard
HIGGS 3	64 bytes - TID: 8 bytes - EPC: 60 bytes	ISO 18000-6C / EPC Class 1 Gen 2
HIGGS 3 US	64 bytes - TID: 8 bytes - EPC: 60 bytes	ISO 18000-6C / EPC Class 1 Gen 2
HIGGS 4	16 bytes - TID: 8 bytes - EPC: 16 bytes	ISO 18000-6C / EPC Class 1 Gen 2
HIGGS 4 US	16 bytes - TID: 8 bytes - EPC: 16 bytes	ISO 18000-6C / EPC Class 1 Gen 2
HIGGS 9	86 bytes - TID: 6 bytes - EPC: 62 bytes	ISO 18000-6C / EPC Class 1 Gen 2
UCODE 7	0 bytes - TID: 12 bytes - EPC: 16 bytes	EPC Class 1 Gen 2
UCODE 7 US	0 bytes - TID: 12 bytes - EPC: 16 bytes	EPC Class 1 Gen 2
UCODE 8	0 bytes - TID: 12 bytes - EPC: 16 bytes	EPC Class 1 Gen 2
UCODE 8 US	0 bytes - TID: 12 bytes - EPC: 16 bytes	EPC Class 1 Gen 2
UCODE 8 M	4 bytes - TID: 12 bytes - EPC: 12 bytes	EPC Class 1 Gen 2
UCODE 9	0 bytes - TID: 12 bytes - EPC: 12 bytes	EPC Gen 2 V2
UCODE G2IL	0 bytes - TID: 8 bytes - EPC: 16 bytes	EPC Class 1 Gen 2
UCODE G2IM	80 bytes - TID: 12 bytes - EPC: 32 bytes	EPC Class 1 Gen 2
UCODE DNA	3072 bytes - TID: 12 bytes - EPC: 56 bytes	ISO 29167-10 / EPC Gen 2 V2
UCODE CITY	128 bytes - TID: 12 bytes - EPC: 28 bytes	ISO 29167-10 / EPC Gen 2 V2



European frequency (EU) 868 MHz - US frequency 920 MHz

RFID features		
Chip	Memory	ISO Standard
UCODE TRACK	32 bytes - TID: 12 bytes - EPC: 56 bytes	ISO 29167-10 / EPC Gen 2 V2
MONZA R5	0 bytes - TID: 16 bytes - EPC: 16 bytes	ISO 18000-6C / EPC Gen 2
MONZA R6	0 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6 US	0 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6A	0 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6B	0 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6P	8 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6P US	8 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA 4D	4 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Class 1 Gen 2
MONZA 4D US	4 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Class 1 Gen 2
MONZA 4E	16 bytes - TID: 12 bytes - EPC: 62 bytes	ISO 18000-63 / EPC Class 1 Gen 2
MONZA 4QT	64 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Class 1 Gen 2
MONZA M730	0 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA M750	4 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
KX2005XG-B	164 bytes - UID: 24 bytes - EPC: 30 bytes	ISO 18000-6C / EPC Class 1 Gen 2
HIGGS-EC	16 bytes - UID: 6 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V1. 2.0
HIGGS-EC US	16 bytes - UID: 6 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V1. 2.0
UCODE TRACK	32 bytes - TID: 12 bytes - EPC: 56 bytes	ISO 29167-10 / EPC Gen 2 V2
MONZA R5	0 bytes - TID: 16 bytes - EPC: 16 bytes	ISO 18000-6C / EPC Gen 2
MONZA R6	0 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6 US	0 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6A	0 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6B	0 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA R6P	8 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V2



European frequency (EU) 868 MHz - US frequency 920 MHz

RFID features		
Chip	Memory	ISO Standard
MONZA R6P US	8 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA 4D	4 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Class 1 Gen 2
MONZA 4D US	4 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Class 1 Gen 2
MONZA 4E	16 bytes - TID: 12 bytes - EPC: 62 bytes	ISO 18000-63 / EPC Class 1 Gen 2
MONZA 4QT	64 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Class 1 Gen 2
MONZA M730	0 bytes - TID: 12 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V2
MONZA M750	4 bytes - TID: 12 bytes - EPC: 12 bytes	ISO 18000-63 / EPC Gen 2 V2
KX2005XG-B	164 bytes - UID: 24 bytes - EPC: 30 bytes	ISO 18000-6C / EPC Class 1 Gen 2
HIGGS-EC	16 bytes- UID: 6 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V1. 2.0
HIGGS-EC US	16 bytes- UID: 6 bytes - EPC: 16 bytes	ISO 18000-63 / EPC Gen 2 V1. 2.0



European frequency (EU) 13.56 MHz + 868 MHz / US frequency 13.56 MHz + 920 MHz

RFID features			
Chip	Memory	ISO Standard	NFC Standard
EM4423	256 bytes - UID/TID: 8 bytes (HF) + 12 bytes (UHF) - EPC: 60 bytes (UHF)	ISO 15693 + ISO 18000-63 / EPC Gen2 V2	Type 5 - tag compliant
EM4423 US	256 bytes - UID/TID: 8 bytes (HF) + 12 bytes (UHF) - EPC: 60 bytes (UHF)	ISO 15693 + ISO 18000-63 / EPC Gen2 V2	Type 5 - tag compliant
MONZA R6P + ICODE SLIX2	8 bytes (UHF) + 316 bytes (HF) - UID/TID: 12 bytes (UHF) + 8 bytes (HF) - EPC: 16 bytes (UHF)	ISO 18000-63 / EPC Gen 2 V2 + ISO 15693	Not supported by majority of NFC devices



frequency 125 kHz + 13.56 MHz

#### RFID features

Chip	Memory	ISO Standard	NFC Standard
MIFARE CLASSIC 1K EV1 S50 + EM4100	1024 bytes (HF) + 0 bytes (LF) - UID: 4/7 bytes (HF) + 8 bytes (LF)	ISO 14443 A	Not supported by majority of NFC devices
MIFARE CLASSIC 1K EV1 S50 + EM4200	1024 bytes (HF) + 0 bytes (LF) - UID: 4/7 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Not supported by majority of NFC devices
MIFARE CLASSIC 4K EV1 S70 + EM4200	4096 bytes (HF) + 0 bytes (LF) - UID: 4 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Type 2 - tag compliant
MIFARE CLASSIC 1K EV1 S50 + T5567	1024 bytes (HF) + 36 bytes (LF) - UID: 4/7 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Not supported by majority of NFC devices
MIFARE CLASSIC 4K EV1 S70 + T5567	4096 bytes (HF) + 36 bytes (LF) - UID: 4 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Type 2 - tag compliant
MIFARE CLASSIC 1K EV1 S50 + 5555	1024 bytes (HF) + 33 bytes (LF) - UID: 4/7 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Not supported by majority of NFC devices
MIFARE CLASSIC 4K EV1 S70 + 5555	4096 bytes (HF) + 33 bytes (LF) - UID: 4 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Type 2 - tag compliant
RF81 + EM4200	1024 bytes (HF) + 0 bytes (LF) - UID: 4 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Not supported by majority of NFC devices
RF81 + T5567	1024 bytes (HF) + 36 bytes (LF) - UID: 4 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Not supported by majority of NFC devices
RF81 + 5555	1024 bytes (HF) + 33 bytes (LF) - UID: 4 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Not supported by majority of NFC devices
MIFARE DESFIRE 4K EV3 + EM4200	4096 bytes (HF) + 0 bytes (LF) - UID: 7 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Type 4 - tag compliant
MIFARE DESFIRE 8K EV3 + EM4200	8192 bytes (HF) + 0 bytes (LF) - UID: 7 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Type 4 - tag compliant
MIFARE DESFIRE 4K EV3 + ATA5577	4096 bytes (HF) + 36 bytes (LF) - UID: 7 bytes (HF) + 8 bytes (LF)	ISO 14443 A + ISO 11784 / 11785	Type 4 - tag compliant

#### Technical specifications

<b>Application</b>	Non-metal surfaces
<b>IP rating</b>	67
<b>Dimensions</b>	348 x 28 x 4 mm
<b>Material</b>	PA66
<b>Weight</b>	6 g
<b>Application method</b>	Seal tag
<b>Operating and storage temperature</b>	-35°C ~ +75°C

#### Customisation

<b>Colours</b>	Black, green; other colours available on request
<b>Type of printing</b>	Silkscreen printing
<b>Type of numbering</b>	Laser technology