


## RFID LABEL LB001

### MARKETS:



Industry

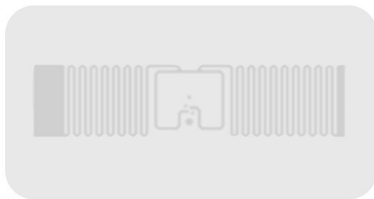

Logistics

### COLOUR:



White

The LB001 is a flexible RFID label made from coated paper. It's rectangular, **measuring 40 x 60 mm, with an inlay size of 11 x 45 mm**, and it's suitable for non-metallic surfaces. Printing and serialisation can be applied using offset or inkjet for colour or black and white designs. Thermographic printing is used for black and white prints.

The LB001 is a white RFID label available in **UHF frequency with the HIGGS 9 chip**.

### MARKETS

The LB001 is ideal for **logistics and asset management projects, as well as for inventory management and access control**.



European frequency (EU) 868 MHz - US frequency 920 MHz

#### RFID features

Chip	Memory	ISO Standard
HIGGS g	86 bytes - TID: 6 bytes - EPC: 62 bytes	ISO 18000-6C / EPC Class 1 Gen 2

#### Technical specifications

Application	Non-metal surfaces
Dimensions	40 x 60 mm, inlay 11 x 45 mm
Material	Coated paper
Weight	0.5 g
Operating temperature	-5°C ~ +60°C
Storage temperature	+20°C ~ +30°C
Application method	Adhesive

#### Customisation

Colour	White
Type of printing and numbering	Colour and b/w: offset, inkjet; thermographic printing in b/w – other types on request

